




PLUS






Description:

Plus is a COB LEDs projector and it is installed on a three-phase track. It produces a luminous flux between 3.600 and 6.800 lumen. It has an IP40 and a maximum power consumption of 55W. It was developed for the lighting of shop windows, shops, exhibits, restaurants, public areas, etc.

Its LEDs have an L70 average life between 50.000 and 75.000 hours in a 25°C ambient temperature room. Plus35 is also available with black or aluminum finish, with a 80, 90 or 93 CRI and with different colour temperatures such as, 2700°K, 3000°, 4000° or 5000°K.

Other colour temperatures and finishes are available upon requests.

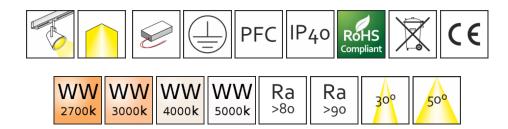





PLUS

Specifications:

Nominal power:

6.PLS.xxxs 198 - 264 VAC 55W

Luminous flux:

2700°k CRI80 4800 L IEE A+
3000°k CRI93 3800 L IEE A
3000°k CRI80 5200 L IEE A+
4000°k CRI80 5200 L IEE A+
5000°k CRI80 5500 L IEE A++

Colour temperature options:

- Warm white 2700°K CRI 80 93
- (On demand)
- Warm white 3000°K CRI 80 93
- Natural white 4000°K CRI 80 90
- Natural white 5000°K CRI 80 90

Projector body:

Anodized aluminum

Connection:

• Three-phase track

Power supply:


230Vac 50/60Hz

Other technical features:


- Insulation class I
- The product was manufactured in compliance with the EN 62471:2009 standards, risk-free

Note: All the data above are typical and can change without notice

Photometric cone diagram

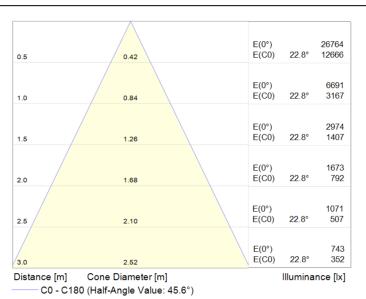

Photometric polar diagram



Upon request is possible to supply the projector with narrower angles.

Co.E.M. srl reserves the right to improve the product in terms of performance and manufacturing without any obligations of prior communication to the client.

Release 1.1 . 2015